

TECHNICAL DATA SHEET

PIR FOLDING PLATFORM

NT 033 – V08 EN – September 2019



1. INTRODUCTION

This mobile folding platform is designed for construction and industry sector. It is for individual use.

Platform equipped with :

- 2 wheels Ø 200 mm – non load-bearing wheels in working position to allow the user to move it around easily
- Serial tool tray 530 x 150 mm
- Folding safety rails
- Mobile straps locking

Delivered mounted and folded.


2. COMPLIANCE

This technical data sheet certifies that the values mentioned are correct as well as in compliance with:

- NF P 93 352.

3. REPRESENTATION


MAXIMUM WORKING LOAD : 150 Kg
Platform dimensions
590 x 430 mm

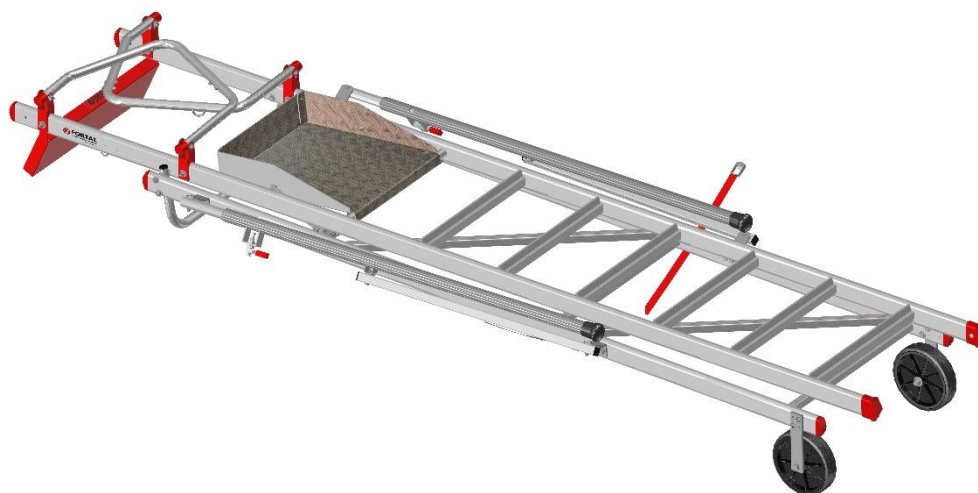

Reference	Description	Thickness, mm	Length, mm
PIR folding platform – overall width = 850 mm			
F090180007	PIR folding platform 7 steps	410	3 090
F090180008	PIR folding platform 8 steps		3 367
F090180009	PIR folding platform 9 steps		3 645
F090180010	PIR folding platform 10 steps		3 920

4. RANGE AND TECHNICAL CHARACTERISTICS

References	Number of steps	Platform height H, mm	Working height, mm	Base dimensions outriggers closed AxB, mm	Base dimensions outriggers deployed AxB, mm	Overall height H, mm	Weight, kg
F090180007	7	1 750	3 750	1 960 x 850	1 960 x 2 670	2 800	29.30
F090180008	8	2 000	4 000	2 145 x 850	2 145 x 2 990	3 050	32.50
F090180009	9	2 250	4 250	2 330 x 850	2 330 x 2 900	3 300	33.70
F090180010	10	2 500	4 500	2 510 x 850	2 510 x 2 790	3 550	35.20

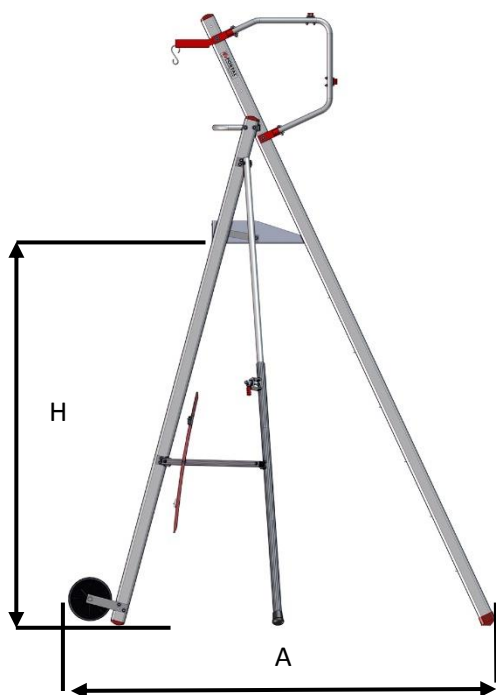


5. OPTIONS

Lifting kit (2 pieces)
F030091810




Double security gates R880030400
(to choice when ordering)

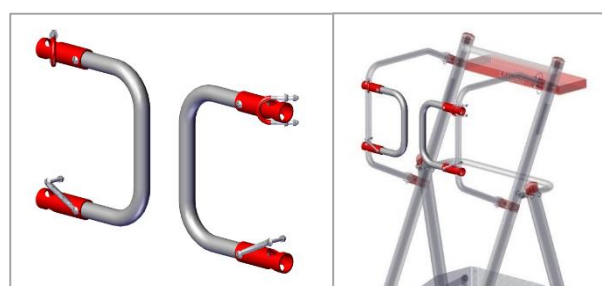

6. COMPONENTS LIST

Description	Nr.	Reference
Strap	1	A720040430
Safety rail support	2	Q704350005
Clasp for strap fixing	3	A710840060
Safety rail	4	R670790045
Red stopper for safety rail	5	A750030026
Sock foot pad 65 x 25 for front side	6	A750011015
Outrigger for 7 steps model	7	F030090079
Outrigger for 8 to 10 steps models		F030090080
Sock foot pad 65 x 25 for rear side	8	A750016527
Pad for outrigger	9	A751120040
Wheel Ø 200 mm with screws and support	10	F030090004
Wheel Ø 200 mm		A790110200
Red handle to block outrigger	11	A700930005
Stopper for rear intermediary rail	12	A750030025
Rear intermediary rail	13	R670790046
Bucket hook	14	A714100590
Tool tray 530 x 150 mm	15	R331030005

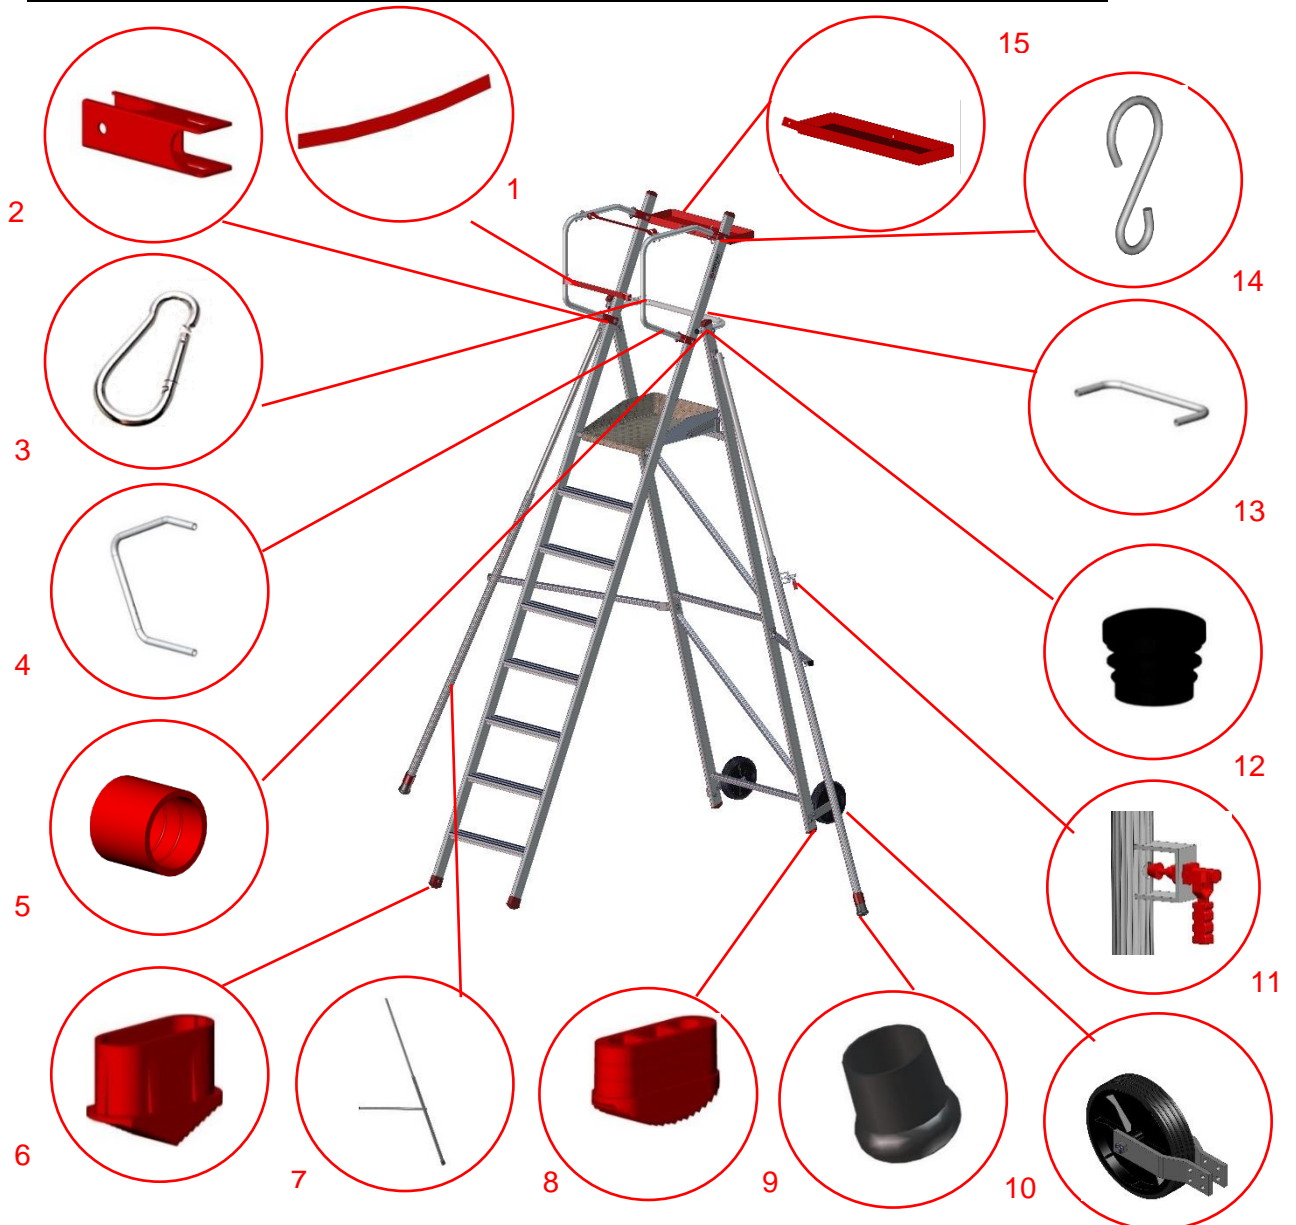

7. SAFETY TIPS

Maximum working load: 1 person - 150 kg



Check that the red handle to lock the outrigger is working properly

Before each use of the PIR platform, verify by visual inspection the following:

- Good state of the PIR platform and its accessories,
- Crimping (assemblies between stiles and rungs)
- Wear or lack of pads
- Possible presence of deformations of the elements
- The sound condition of welds
- Presence of the product identification label (fixed on one of the stile)
- For replacement of some elements, use only original FORTAL elements.

Tips for optimal use:

- Surfaces of use must be flat and not slippery
- Climb and descent of the platform always be done from the front
- Use suitable footwear providing safe support
- Never climb on the safety rails and tool tray.

Maintenance:

Clean regularly with a cloth the sliding parts to avoid damaging of the guiding system. .

8. WARRANTY

FORTAL guarantees its own manufactured products (excepting specific clauses accepted by the customer and FORTAL) for a period of 2 years from the delivery date (date given on the delivery note) against all manufacturing defects, with the exception of:

- Labour and travelling costs
- Wear and tear due to impacts, a lack of maintenance, chocks, etc
- Use in inappropriate conditions or conditions that do not comply with those defined herein or installations that do not comply with the user installation instructions.

Any other compensation is formally excluded from the warranty, including operating loss, damage incurred and any prejudice whatsoever subsequent to using our manufactured products.

Any modification, repair or replacement of parts during the warranty period does not extend the period of cover.

Should our manufactured products be modified outside our production site without our prior written agreement, FORTAL's liability cannot be incurred.

